

MINI PCI-EXPRESS CONNECTOR

HEIGHT 5.2/5.6/6.8/8.0/9.2mm

245C - 3 B 0 A - 0 X X - X

Stand Off:

052 : H = 5.2mm

056 : H = 5.6mm

068 : H = 6.8mm


080 : H = 8.0mm

092 : H = 9.2mm


Package

1. Tray

3. Tape & Reel

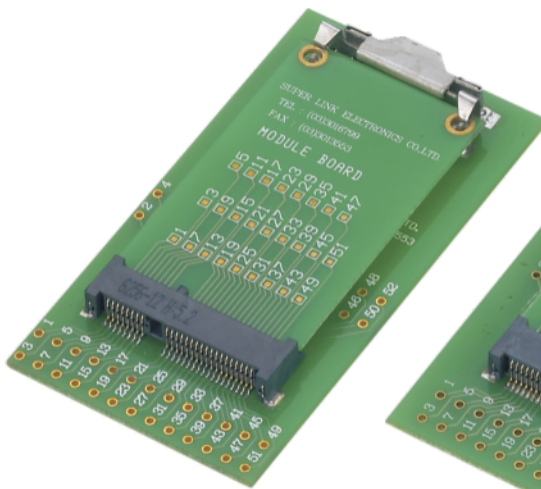

• Latch Type

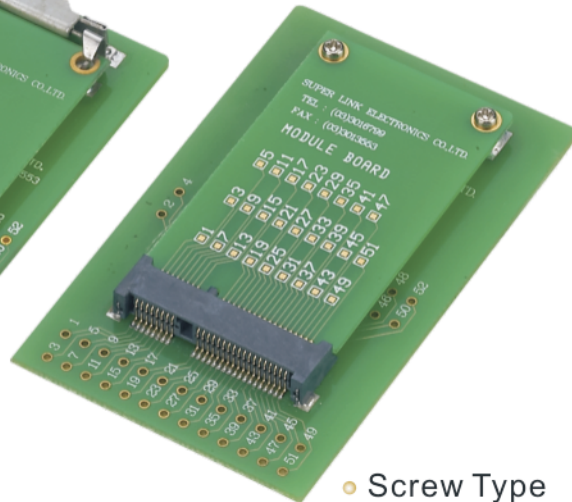

• Screw Type




MATERIAL

Parts	Material	Surface
Housing	High Temperature Thermo Plastic, UL94V-0	Black
Terminal	Copper Alloy	Gold plate over Nickel
Solder Tab	Copper Alloy	Sn over Nickel

APPLICATION : Notebook, Set-Top-Box, Wireless Router and AP, etc

RATING

Connector Current	0.5 A per contact
Contact Resistance	30 mΩ max.
Insulation Resistance	500 MΩ min.(at 500V DC)
Dielectric Withstanding Voltage	No breakdown or flash over(at 250V AC)

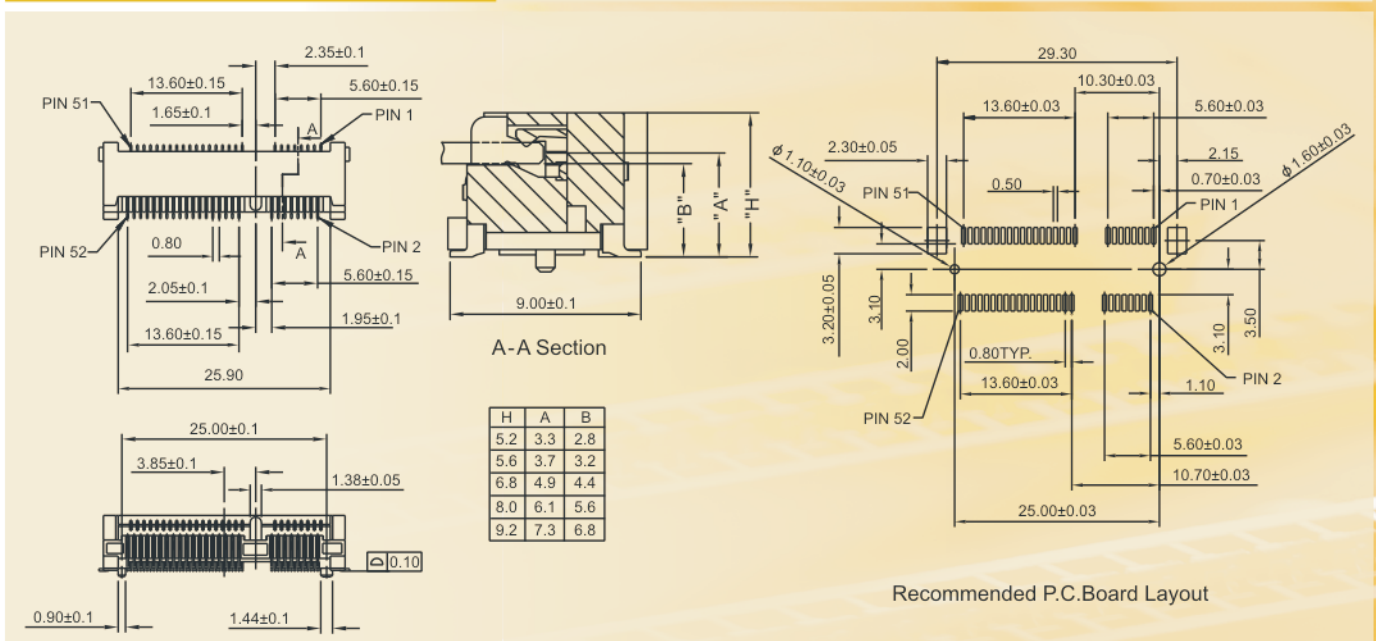

ALL LINK CORP. /ALL LINK ELECTRONICS CO.

4F-11, NO.39, SEC.3,ZHONGSHAN RD., ZHONGHE CITY, TAIPEI235, TAIWAN
TEL#:886-2-82286830 FAX#:886-2-82286832 <http://www.alllink.com.tw>